


Lámina Perforada

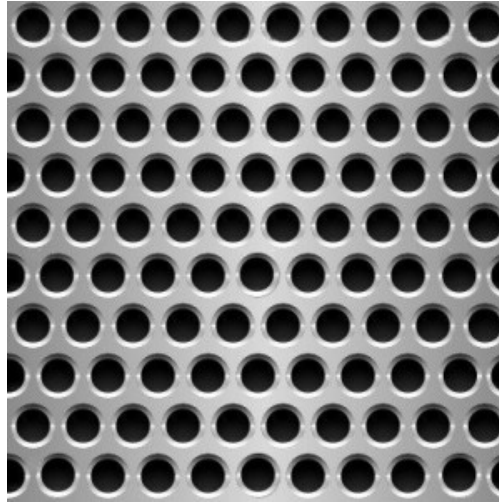

Código	Diámetro de perforación		Distancia entre centros		Perforaciones por Pulg ²	Área libre %
	Mm	Pulg.	Mm.	Pulg.		
E062/125	1.6	0.063	3.2	0.1260	74	22
E078/137	2	0.079	3.5	0.1378	62	29
E078/157	2	0.079	4	0.1575	47	22
E093/157	2.4	0.094	4	0.1575	47	32
E093/250	2.4	0.094	6.4	0.2520	18	13
E098/157	2.5	0.098	4	0.1575	47	35
E118/196	3	0.118	5	0.1969	30	33
E125/187	3.2	0.126	4.7	0.1850	33	41
E125/250	3.2	0.126	6.4	0.2520	18	23
E157/187	4	0.157	4.7	0.1850	23	64
E157/250	4	0.157	6.4	0.2520	18	36
E187/250	4.7	0.185	6.4	0.2520	18	51
E196/275	5	0.197	7	0.2756	15	46
E196/314	5	0.197	8	0.3150	12	35
E236/314	6	0.236	8	0.3150	12	51
E236/354	6	0.236	9	0.3543	9	40
E275/393	7	0.276	10	0.3937	7	44
E314/393	8	0.315	10	0.3937	7	58
E354/472	9	0.354	12	0.4724	5	51
E375/500	9.5	0.374	12.7	0.5000	5	51
E393/511	10	0.394	13	0.5118	4	54
E472/629	12	0.472	16	0.6299	3	51
E500/687	12.7	0.500	17.4	0.6850	2	48
E750/1000	19.1	0.752	25.4	1.0000	1	51
E1000/1500	25.4	1.000	38.1	1.5000	0.5	40