




Lámina Perforada

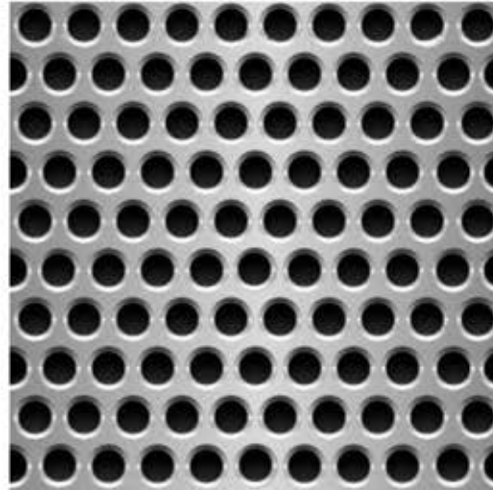

| Código | Diámetro de perforación | | Distancia entre centros | | Perforaciones por Pulg ² | Área libre % |
|------------|-------------------------|-------|-------------------------|--------|-------------------------------------|--------------|
| | Mm | Pulg. | Mm. | Pulg. | | |
| E062/125 | 1.6 | 0.063 | 3.2 | 0.1260 | 74 | 22 |
| E078/137 | 2 | 0.079 | 3.5 | 0.1378 | 62 | 29 |
| E078/157 | 2 | 0.079 | 4 | 0.1575 | 47 | 22 |
| E093/157 | 2.4 | 0.094 | 4 | 0.1575 | 47 | 32 |
| E093/250 | 2.4 | 0.094 | 6.4 | 0.2520 | 18 | 13 |
| E098/157 | 2.5 | 0.098 | 4 | 0.1575 | 47 | 35 |
| E118/196 | 3 | 0.118 | 5 | 0.1969 | 30 | 33 |
| E125/187 | 3.2 | 0.126 | 4.7 | 0.1850 | 33 | 41 |
| E125/250 | 3.2 | 0.126 | 6.4 | 0.2520 | 18 | 23 |
| E157/187 | 4 | 0.157 | 4.7 | 0.1850 | 23 | 64 |
| E157/250 | 4 | 0.157 | 6.4 | 0.2520 | 18 | 36 |
| E187/250 | 4.7 | 0.185 | 6.4 | 0.2520 | 18 | 51 |
| E196/275 | 5 | 0.197 | 7 | 0.2756 | 15 | 46 |
| E196/314 | 5 | 0.197 | 8 | 0.3150 | 12 | 35 |
| E236/314 | 6 | 0.236 | 8 | 0.3150 | 12 | 51 |
| E236/354 | 6 | 0.236 | 9 | 0.3543 | 9 | 40 |
| E275/393 | 7 | 0.276 | 10 | 0.3937 | 7 | 44 |
| E314/393 | 8 | 0.315 | 10 | 0.3937 | 7 | 58 |
| E354/472 | 9 | 0.354 | 12 | 0.4724 | 5 | 51 |
| E375/500 | 9.5 | 0.374 | 12.7 | 0.5000 | 5 | 51 |
| E393/511 | 10 | 0.394 | 13 | 0.5118 | 4 | 54 |
| E472/629 | 12 | 0.472 | 16 | 0.6299 | 3 | 51 |
| E500/687 | 12.7 | 0.500 | 17.4 | 0.6850 | 2 | 48 |
| E750/1000 | 19.1 | 0.752 | 25.4 | 1.0000 | 1 | 51 |
| E1000/1500 | 25.4 | 1.000 | 38.1 | 1.5000 | 0.5 | 40 |